

Features

- Output current greater than 1.0A
- Range Output voltage range adjustable from 1.25V to 37V

Applications


- Power Management for Computer Mother Board, Graphic Card
- LCD Monitor and LCD TV
- DVD Decode Board
- ADSL Modem
- Post Regulators for Switching Supplies

General Description

The HM317 device is an adjustable three-terminal positive-voltage regulator capable of supplying more than 1.0A over an output-voltage range of 1.25V to 37V. HM317 features a very low standby current 1.5mA .


HM317 is available in TO-220/TO-263 and SOT223 package.

Block Diagram

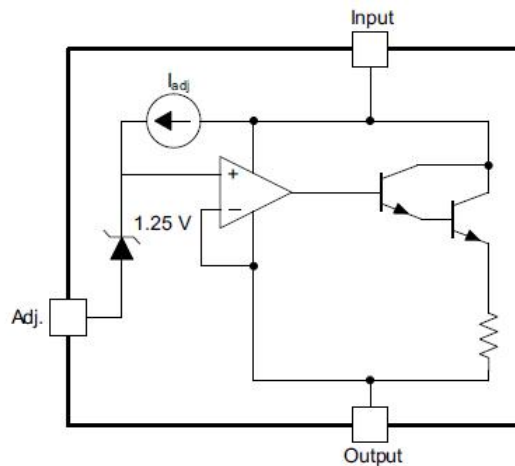

Pin Configuration

TO220 Top View

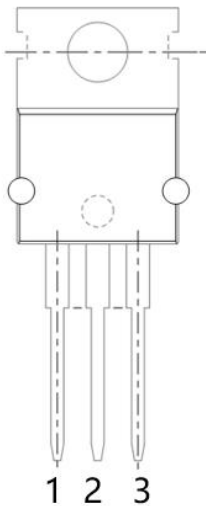

SOT223 (Top View)



TUẾ HÁ [] Áa,




Table1: HM317 series (TO-220/TO-263 PKG)

PIN NO.	PIN NAME	FUNCTION
1	ADJ	ADJ pin
2	VOUT	Output voltage pin
3	VIN	Input voltage pin

Table2: HM317 series (SOT223 PKG)

PIN NO.	PIN NAME	FUNCTION
1	ADJ	ADJ pin
2	VOUT	Output voltage pin
3	VIN	Input voltage pin
4	VOUT	Output voltage pin

Absolute Maximum Ratings

Max Input Voltage	40V
Max Operating Junction Temperature(Tj)	150°C
Ambient Temperature(Ta)	-20°C~ 85°C
Storage Temperature(Ts)	-40°C~150°C

Caution: Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.

Thermal Information

Symbol	Parameter	TO220	UNIT
$R_{\theta(JA)}$	Junction-to-ambient thermal resistance	37.9	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	51.1	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	23.2	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	13.0	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	22.8	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	4.2	°C/W

Electrical Characteristics

T_A=25°C, unless otherwise noted.


Parameter	Test Conditions	Min	Typ	Max	Unit
Line regulation	V _I -V _O =3V to 40V T _J =25°C	-5	--	5	mV
Load regulation	I _o =10mA to 1500mA	-25	--	25	mV
Reference viltage	V _I - V _O =3V to 40V, P _D ≤20W, I _o =10mA to 1.0A	1.2	1.25	1.3	V
Output-voltage Temperature stability	T _J = 0°C to 125°C		0.7		%V _O
Maximum output current	V _I - V _O ≤ 15V, T _J =25°C	1.0	2		A

Detailed Description

HM317 device is an adjustable three-terminal positive-voltage regulator capable of supplying up to 1.0A over an output-voltage range of 1.25V to 37V. It requires only two external resistors to set the ouput voltage. The device features a typical line regulation of 1mV and typical load regulation of 7 mV.

The HM317 device is versatile in its applications, including uses in programmable output regulation and local on-card regulation. Or, by connecting a fixed resistor between the ADJUST and OUTPUT terminals, the HM317 device can function as a precision current regulator. An optional output capacitor can be added to improve transient response.

Typical Application

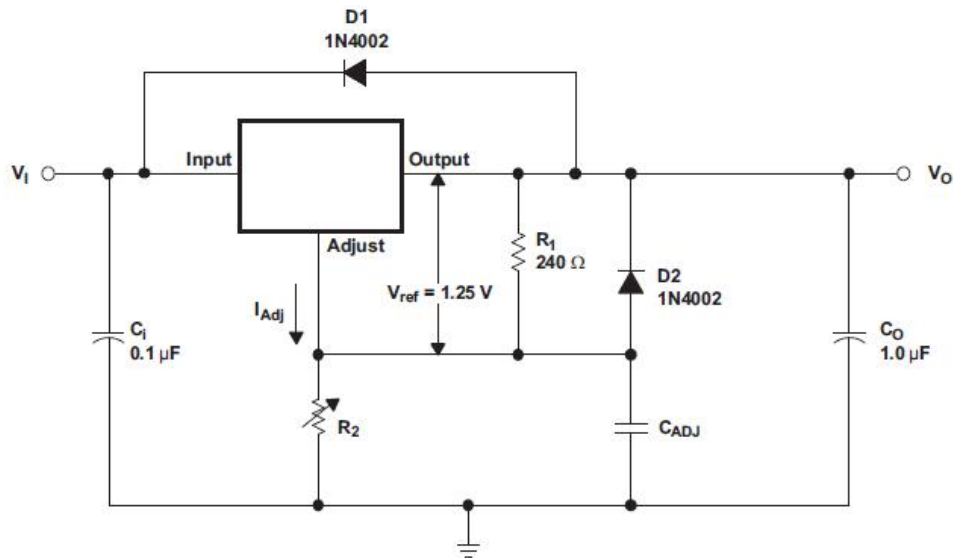


Adjustable Voltage Regulator


1. R1 and R2 are required to set the output voltage.
2. C_{ADJ} is recommended to improve ripple rejection. It prevents amplification of the ripple as the output voltage is adjusted higher.
3. C_i is recommended, particularly if the regulator is not in close proximity to the power-supply filter capacitors. A 0.1μF or 1μF ceramic or tantalum capacitor provides sufficient bypassing for most applications, especially when adjustment and output capacitors are used.
4. C_o improves transient response, but is not needed for stability.
5. Protection diode D2 is recommended if C_{ADJ} is used. The diode provides a low-impedance discharge path to prevent the capacitor from discharging into the output of the regulator.
6. Protection diode D1 is recommended if C_o is used. The diode provides a low-impedance discharge path to prevent the capacitor from discharging into the output of the regulator.
7. V_o is calculated as shown: $V_o = V_{REF}(1+R_2/R_1) + (I_{ADJ} \times R_2)$, I_{ADJ} is typically 50μA and negligible in most applications.

Typical Performance Characteristics


Line Transient Response

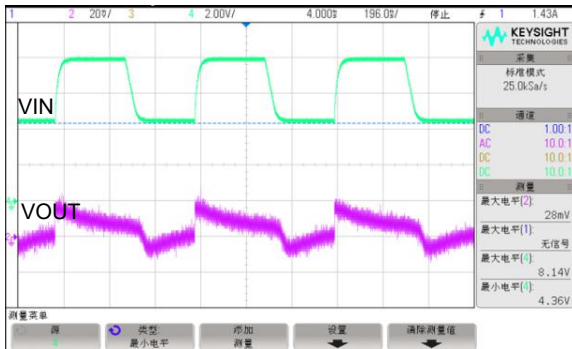


Load Transient Response

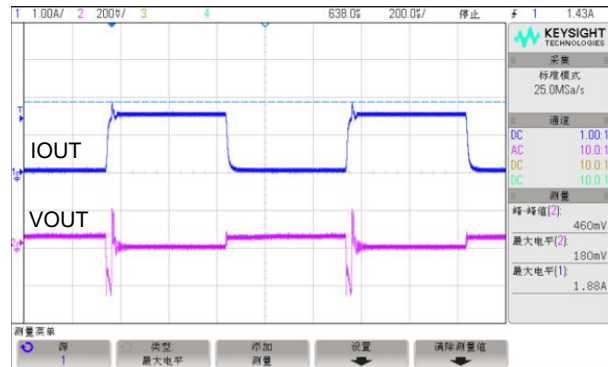

Package Information
TO220 Package

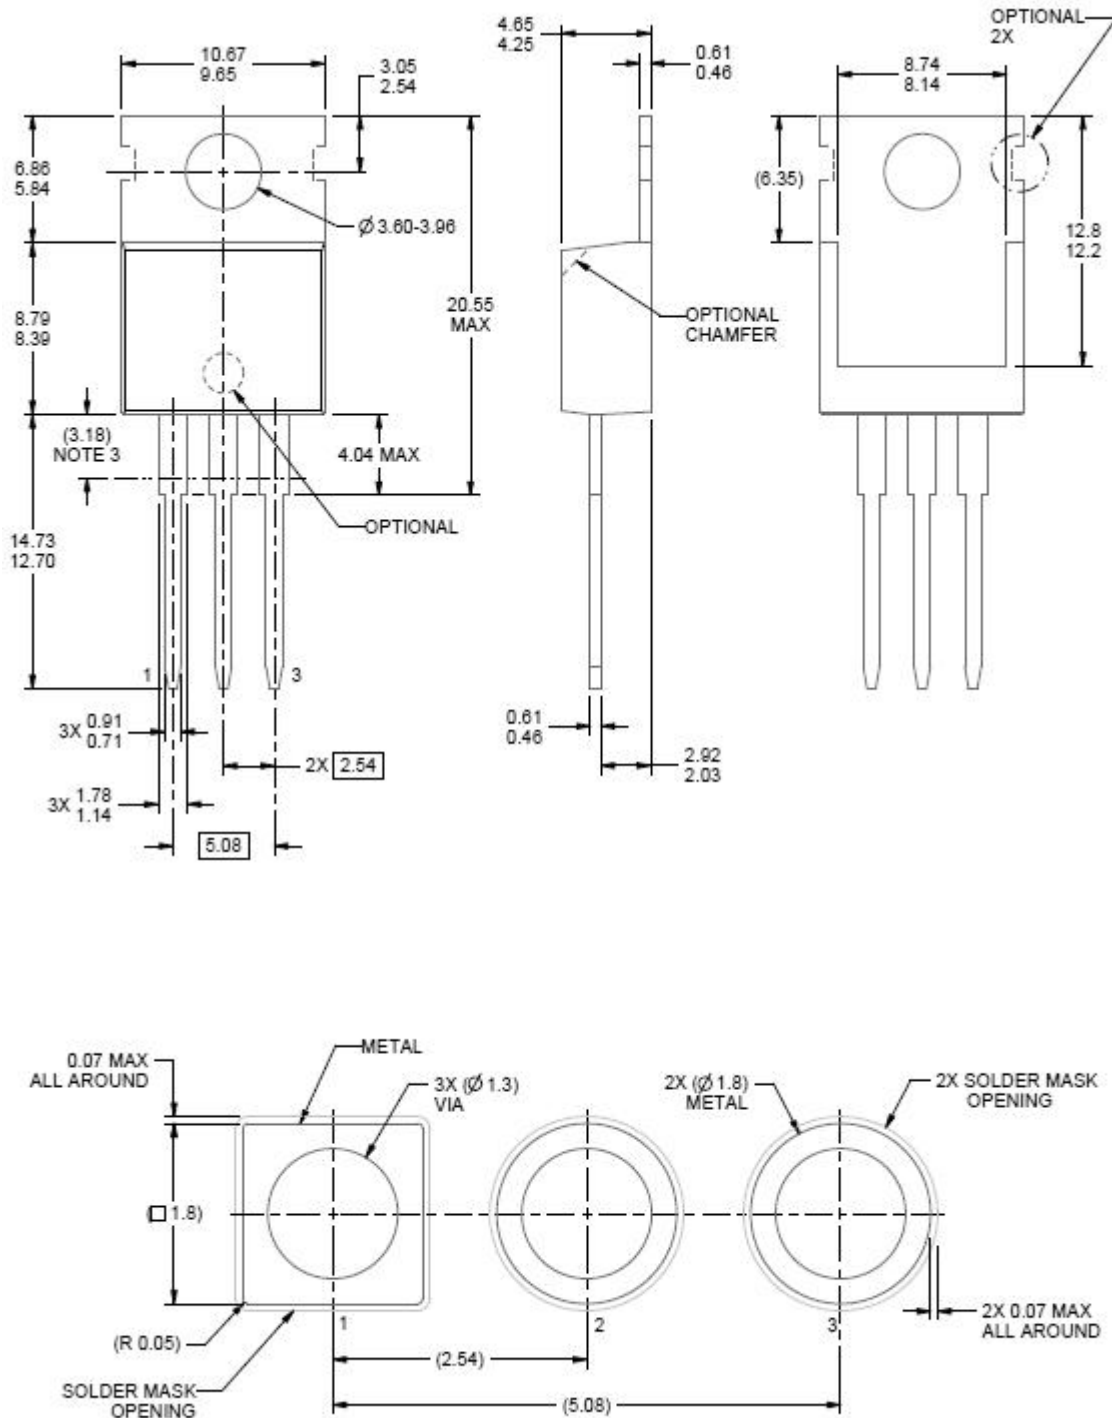

SOT223 Package

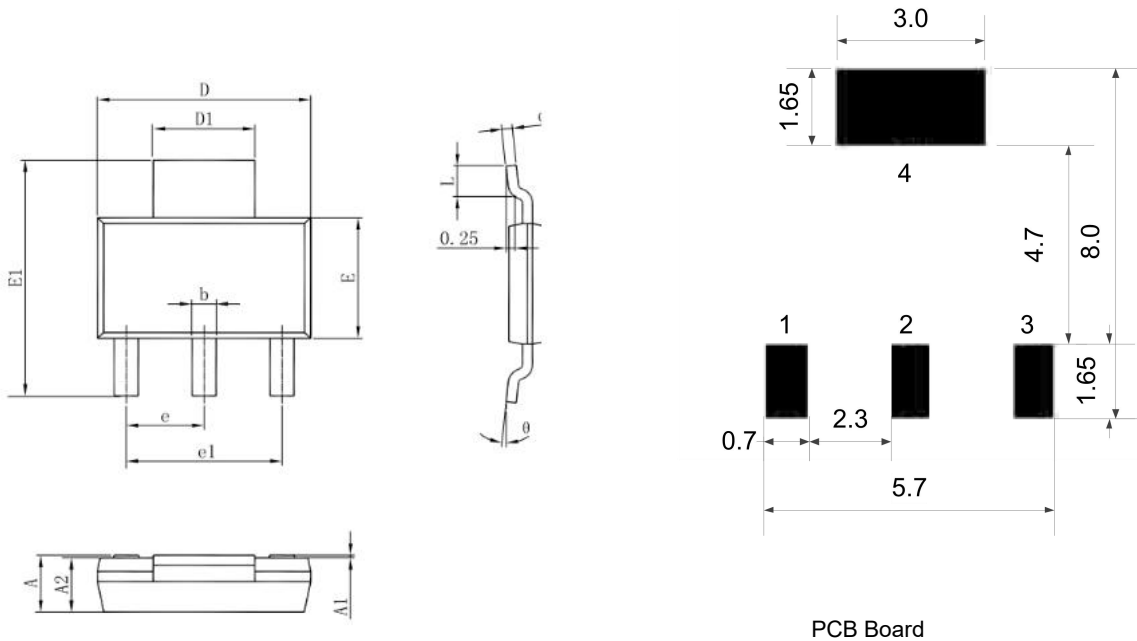

PCB Board

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.520	1.800	0.060	0.071
A1	0.000	0.100	0.000	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.820	0.026	0.032
c	0.250	0.350	0.010	0.014
D	6.200	6.400	0.244	0.252
D1	2.900	3.100	0.114	0.122
E	3.300	3.700	0.130	0.146
E1	6.830	7.070	0.269	0.278
e	2.300(BSC)		0.091(BSC)	
e1	4.500	4.700	0.177	0.185
L	0.900	1.150	0.035	0.045
θ	0°	10°	0°	10°